


DIN 603-ISO 8677

Vis à tête bombée collet carré

Cup head square neck bolt

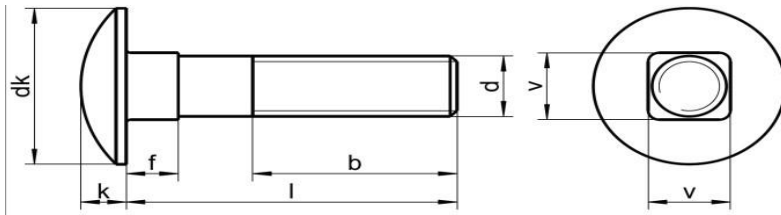

dk	12,45/13,55	15,45/16,55	19,35/20,65	23,35/24,65	29,35/30,65	37,20/38,80
f	2,90/4,10	3,40/4,60	4,40/5,60	5,40/6,60	7,25/8,75	11,10/12,90
k	2,70/3,30	3,12/3,88	4,12/4,88	4,62/5,38	6,05/6,95	8,05/8,95
l ≤ 125 mm	16	18	22	26	30	38
b 125 mm < l ≤ 200 mm	22	24	28	32	36	44
l > 200 mm	--	--	41	45	49	57
v	4,52/5,48	5,52/6,48	7,42/8,58	9,42/10,58	11,30/12,70	15,30/16,70
l/d	M5	M6	M8	M10	M12	M16
12						
16						
20						
25						
30						
35						
40						
45						
50						
55						
60						
65						
70						
75						
80						
90						
100						
110						
120						
130						
140						
150						
160						
180						
200						
220						

FC/Ft

FP/Pt

Disponible :	Acier Inoxydable	A2	A4
	Acier au carbone	4.8	8.8