


DIN 6921 ISO 1665

Vis à tête hexagonale à embase

Hexagon head bolt with flange, without serration

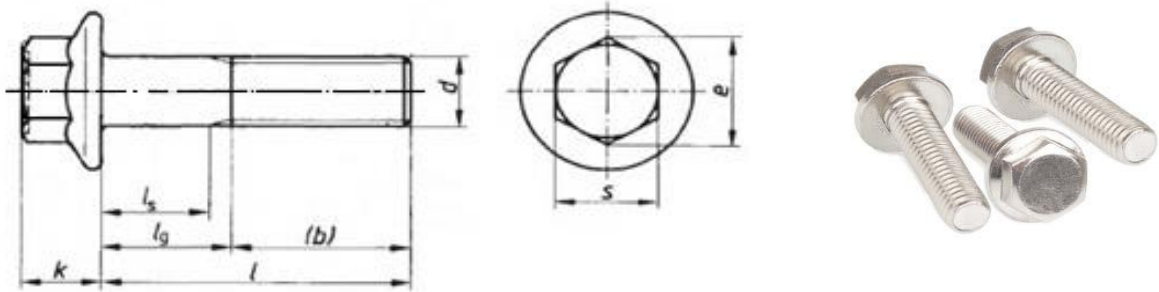

Thread size		M5	M6	M8	M10				
P^*		0,8	1	1,25	1,5				
b	b for $L \leq 125$	16	18	22	26				
	b for $L > 125$	-----	-----	28	32				
	b for $L \geq 200$	-----	-----	-----	-----				
d_c	max.	11,8	14,2	18	22,3				
e	min.	8,71	10,95	14,26	16,5				
k	max.	5,4	6,6	8,1	9,2				
s	nominal size = max.	8	10	13	15				
	min.	7,78	9,78	12,73	14,73				
l		l_s	l_g	l_s	l_g	l_s	l_g	l_s	l_g
(8)		/	/	/	/	/	/	/	/
10		-----	2,4						
12		-----	2,4	-----	3				
16		-----	2,4	-----	3	-----	4		
20		-----	4	-----	3	-----	4	-----	4,5
25		5	9	2	7	-----	4	-----	4,5
30		10	14	7	12	-----	8	-----	4,5
35		15	19	12	17	6,75	13	-----	9
40		20	24	17	22	11,75	18	6,5	14
45		25	29	22	27	16,75	23	11,5	19
50		30	34	27	32	21,75	28	16,5	24
55				32	37	26,75	33	21,5	29
60				37	42	31,75	38	26,5	34
65						36,75	43	31,5	39
70						41,75	48	36,5	44
80						51,75	58	46,5	54
90								56,5	64
100								66,5	74

Disponible:	Acier Inoxydable	A2	A4
	Acier au carbone	8.8	10.9