


DIN 7504 M (N)-ISO 15481

Vis autoperceuse tête cylindrique (Phillips H)

Cross recessed (Phillips H) pan head drilling screw with tapping screw thread

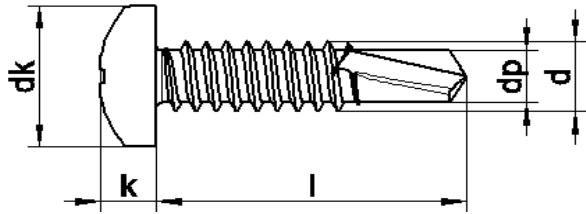

<i>Thk. sheets</i>	0,7 + 0,7 = 1,4	1 + 1 = 2	1 + 1 = 2	1 + 1 = 2	1,5 + 1,5 = 3	2 + 3 = 5	2 + 3 = 5
dp	2,3	2,8	3,1	3,6	4,1	4,8	5,8
dk	max.	5,60	7,00	7,50	8,00	9,50	12,00
	min.	5,30	6,64	7,14	7,64	9,14	11,57
k	max.	2,40	2,60	2,80	3,10	3,70	4,60
	min.	2,15	2,35	2,55	2,80	3,40	4,30
[Phillips]	1	2				3	
l/ \varnothing	\varnothing 2,9	\varnothing 3,5	\varnothing 3,9	\varnothing 4,2	\varnothing 4,8	\varnothing 5,5	\varnothing 6,3
9,5	2,9x9,5	3,5x9,5	3,9x9,5				
13	2,9x13	3,5x13	3,9x13	4,2x13	4,8x13		
16	2,9x16	3,5x16	3,9x16	4,2x16	4,8x16	5,5x16	
19	2,9x19	3,5x19	3,9x19	4,2x19	4,8x19	5,5x19	6,3x19
22		3,5x22	3,9x22	4,2x22	4,8x22	5,5x22	6,3x22
25		3,5x25	3,9x25	4,2x25	4,8x25	5,5x25	6,3x25
32			3,9x32	4,2x32	4,8x32	5,5x32	6,3x32
38			3,9x38	4,2x38	4,8x38	5,5x38	6,3x38
45					4,8x45	5,5x45	6,3x45
50					4,8x50	5,5x50	6,3x50
60					4,8x60		
70					4,8x70		

Disponible:

Acier Inoxydable

A2

A4

Acier au carbone

4.8