



DIN 912

Vis à tête cylindrique à six pans creux

DIN 912

Hexagon socket head cap, tapping screws

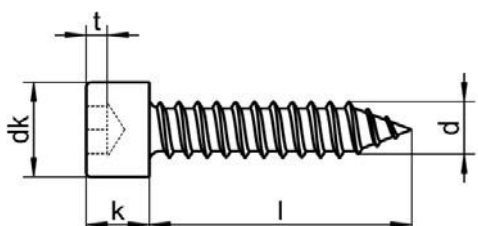

s	4	5	5
dk	8,5	10	10
k max	5	6	6
t min.	2,5	3	3
⬡	4	5	5
l/∅	∅ 4,8	∅ 5,5	∅ 6,3
9,5	9,5x4,8	9,5x5,5	9,5x6,3
13	13x4,8	13x5,5	13x6,3
16	16x4,8	16x5,5	16x6,3
19	19x4,8	19x5,5	19x6,3
22	22x4,8	22x5,5	22x6,3
25	25x4,8	25x5,5	25x6,3
32	32x4,8	32x5,5	32x6,3
38	38x4,8	38x5,5	38x6,3
42	42x4,8	42x5,5	42x6,3
45	45x4,8	45x5,5	45x6,3
50	50x4,8	50x5,5	50x6,3
55	55x4,8	55x5,5	55x6,3
60	60x4,8	60x5,5	60x6,3
70	70x4,8	70x5,5	70x6,3

Disponible:

Acier Inoxydable

A2  A4 

Acier au carbone

4.8 